




BCI ALGÉRIE
Certification ISO 9001



Drainage channel

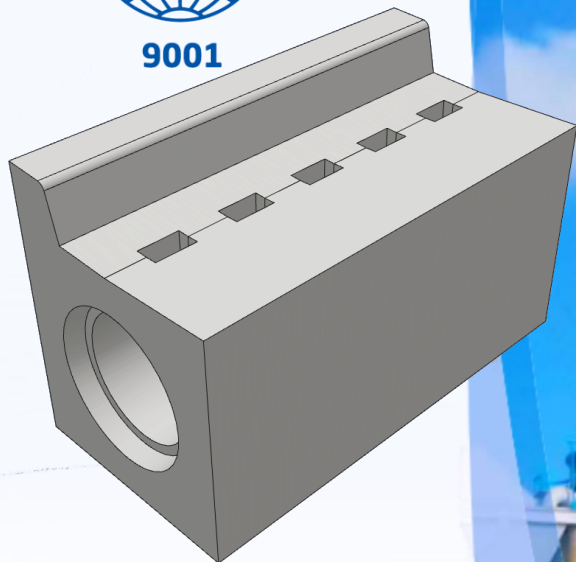

SAPCI
Depuis 1969

**SAPCI est votre partenaire
sur chantier pour tous vos travaux
en Béton prêt à l'emploi**

**Unité de Production BPE
Ouled Heddadj 35052
W.Boumerdès
Mob.: 0560 02 57 85**




SAPCI votre partenaire depuis 1969
www.sapci-dz.com

BÉTON PRÊT A L'EMPLOI



**Centre de production de BPE
Ouled Heddadj**

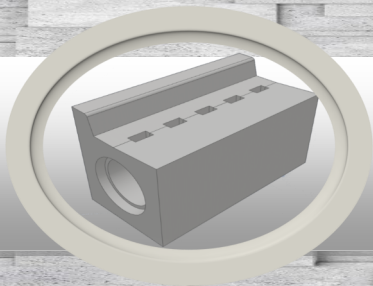



drainage channel




Désignation	H	l	h	L	a	b	∅	Unit weight (kg)	Class of concrete MPA
CFB-D	600 mm	600 mm	140mm	1200 mm	60 mm	110 mm	300 mm	835 kg	C40/50
CFB-C	600 mm	600 mm	140mm	1200 mm	60 mm	1200mm	300 mm	823 kg	C40/50




Drainage Channel with Border **discontinuons central slot**

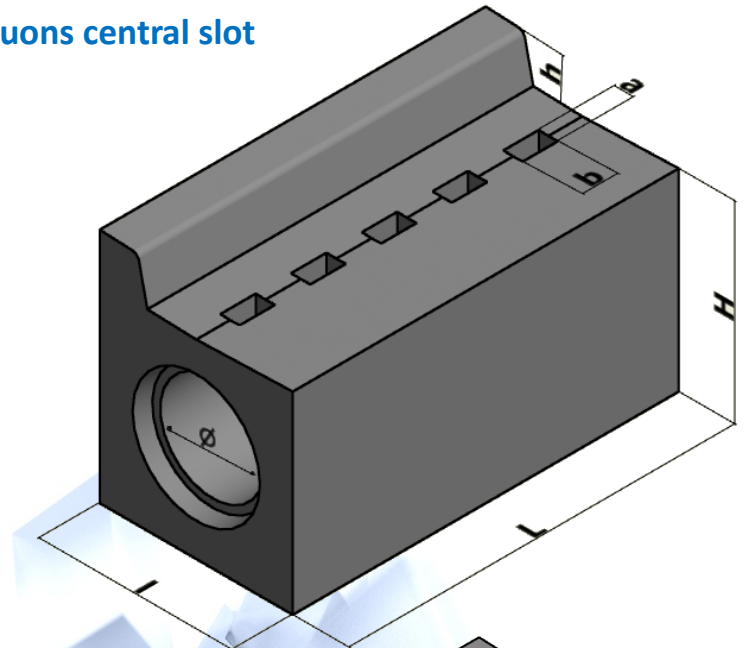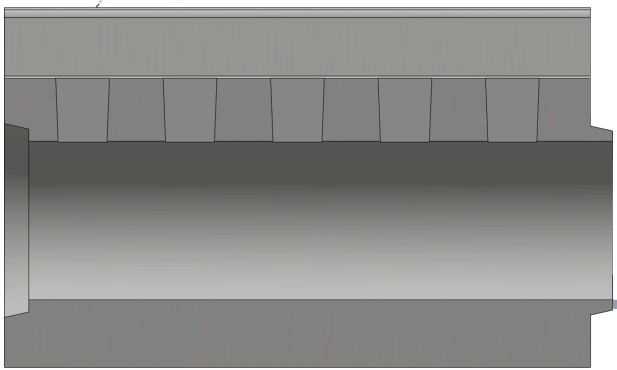

Drain Channel with Border **continuous central slot**

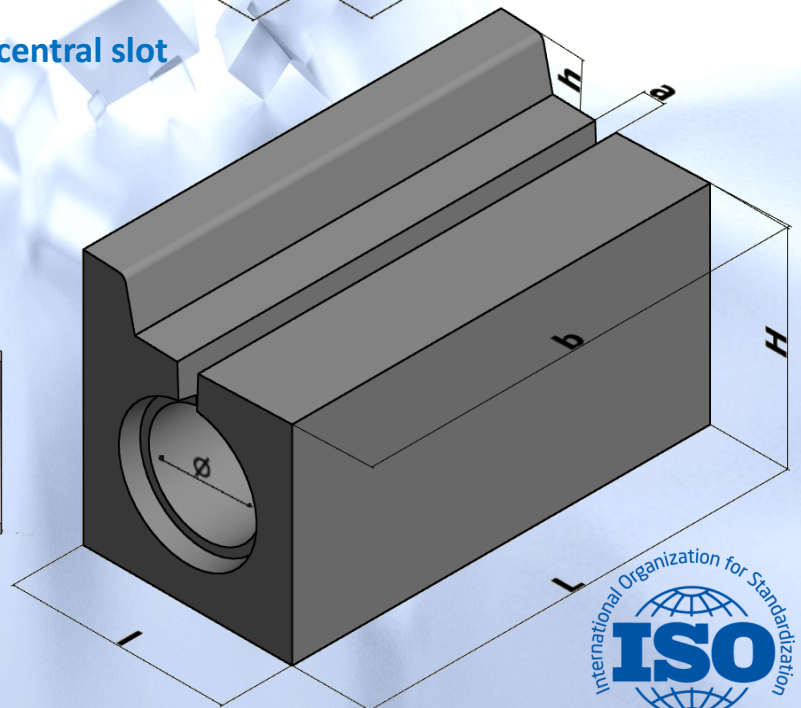


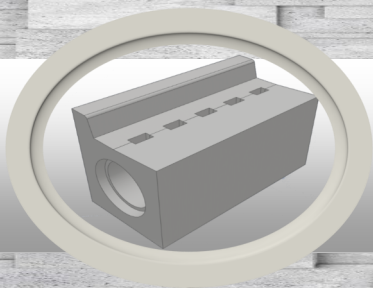


drainage channel






Désignation	H	l	L	a	b	∅	Unit weight (kg)	Class of concrete MPA
CF-D	600 mm	600 mm	1200 mm	60 mm	110 mm	300 mm	835 kg	C40/50
CF-C	600 mm	600 mm	1200 mm	60 mm	1200mm	300 mm	823 kg	C40/50

 Drainage Channel **discontinuons central slot**

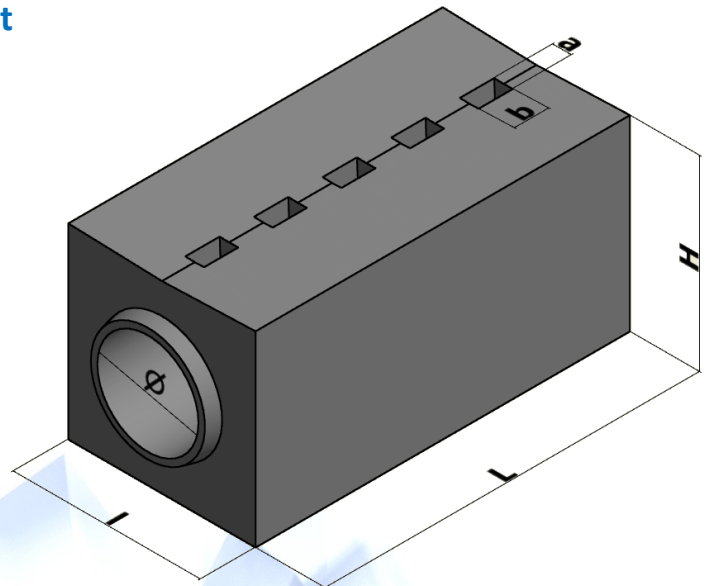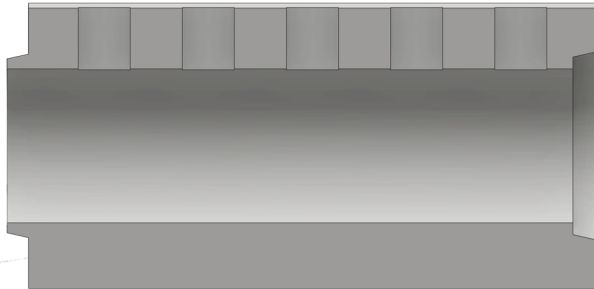

 Drain Channel **continuous central slot**

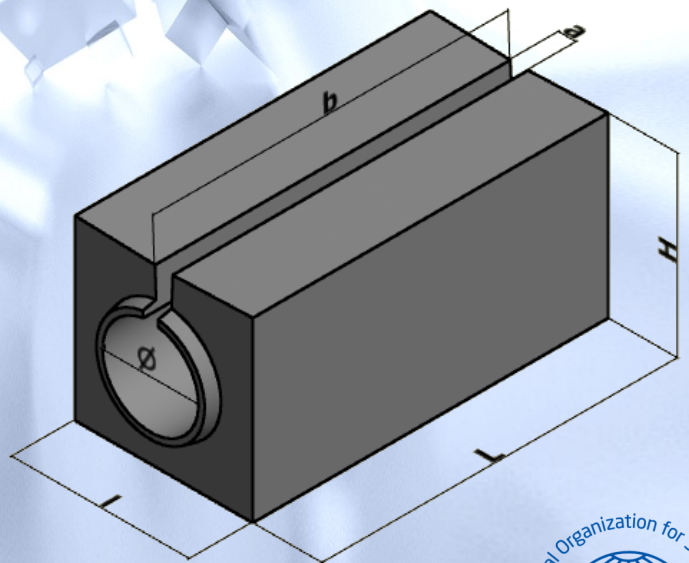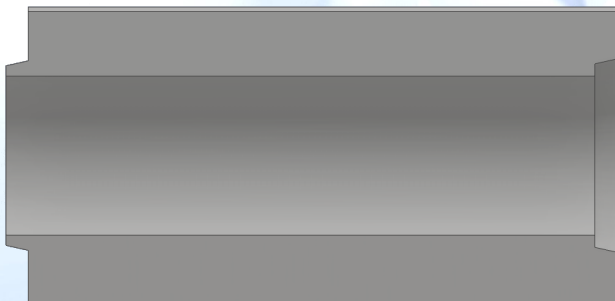

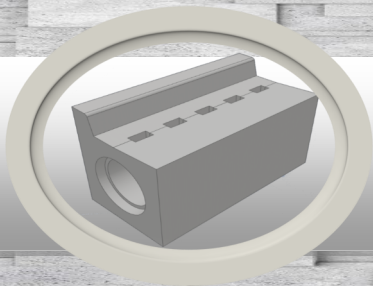


drainage channel

Description:

When we talk about Drainage Channel, we are talking about simple concrete or section-reinforced concrete parts, with a square exterior and a circular interior with a continuous groove, on the top and all along its length.

Drainage channel with upper groove are usually used in the collection and conduct of water discharged on the ground and heading towards the central separator.

 SAPCI has two geometries, one with a diameter of 30 cm and another with a diameter of 40 cm; both can be made armed.

Characteristics:

- **Application: street, for public space.**
- **Material: concrete.**
- **Typology: central slit (continuous and discontinuous).**




EXPANSION AREA BETWEEN CHANNEL


Provide a space for expansion between channels of 5 mm.

5 mm

Space for expansion

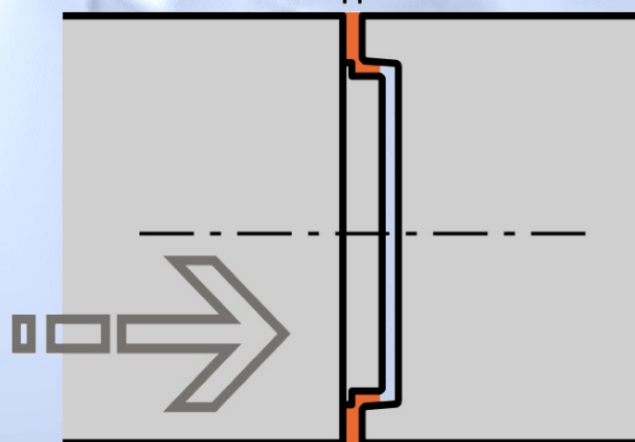




Flexible seal

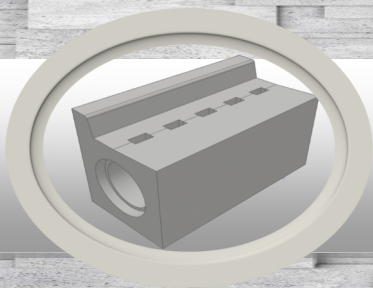


drainage channel



Allow 3 to 5 mm between the finished pavement level and the top level of the gutter.

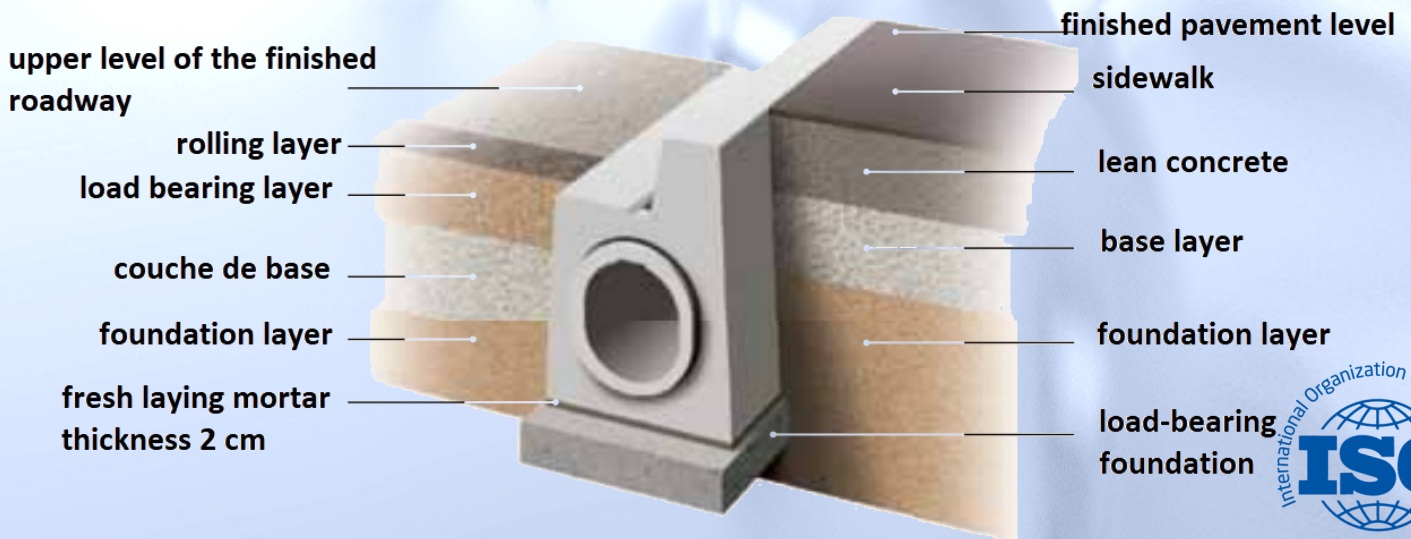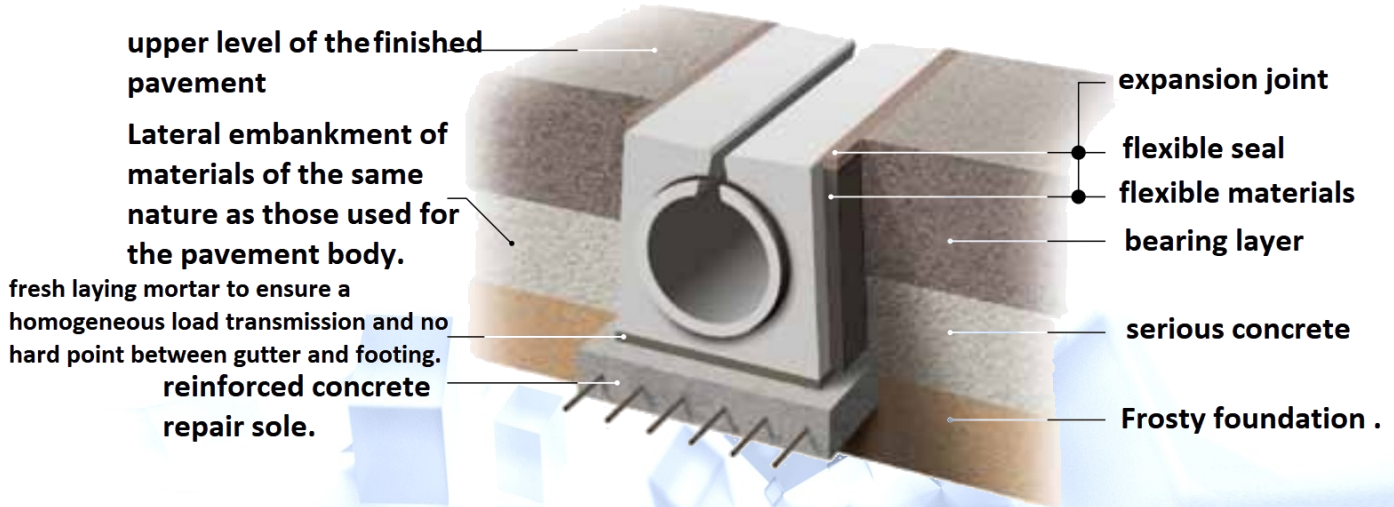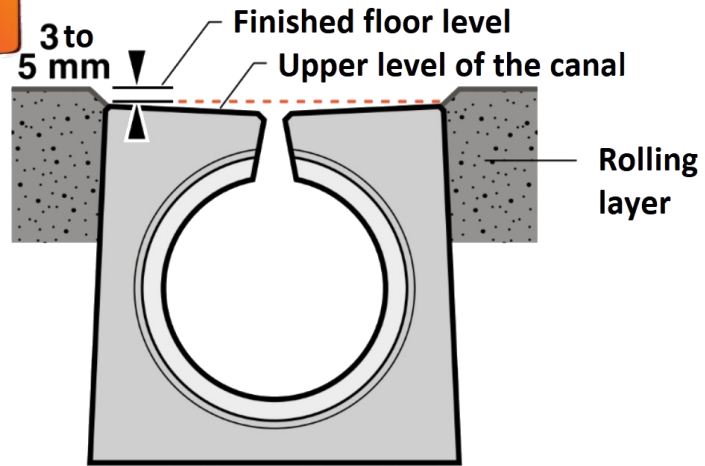

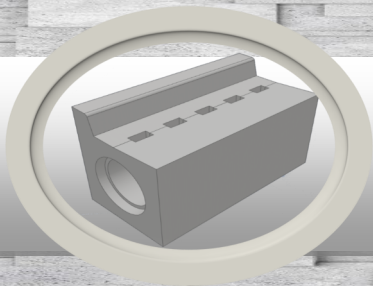

drainage channel



BCI ALGÉRIE
Certification ISO 9001

